

Diode

Silicon Carbide Schottky Diode

IDH10G120C5

5th Generation CoolSiC™ 1200 V SiC Schottky Diode

Final Datasheet


Rev. 2.1 2017-07-21

Industrial Power Control

CoolSiC™ SiC Schottky Diode

Features:

- Revolutionary semiconductor material - Silicon Carbide
- No reverse recovery current / No forward recovery
- Temperature independent switching behavior
- Low forward voltage even at high operating temperature
- Tight forward voltage distribution
- Excellent thermal performance
- Extended surge current capability
- Specified dv/dt ruggedness
- Qualified according to JEDEC¹⁾ for target applications
- Pb-free lead plating; RoHS compliant

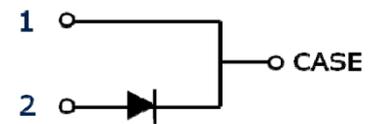

Benefits

- System efficiency improvement over Si diodes
- Enabling higher frequency / increased power density solutions
- System size / cost savings due to reduced heatsink requirements and smaller magnetics
- Reduced EMI
- Highest efficiency across the entire load range
- Robust diode operation during surge events
- High reliability
- RelatedLinks: www.infineon.com/sic



Applications

- Solar inverters
- Uninterruptable power supplies
- Motor drives
- Power Factor Correction

Package pin definitions

- Pin 1 and backside – cathode
- Pin 2 – anode



Key Performance and Package Parameters

Type	V _{DC}	I _F	Q _C	T _{j,max}	Marking	Package
IDH10G120C5	1200V	10A	41nC	175°C	D1012C5	PG-TO220-2-1

1) J-STD20 and JEDEC22

Table of Contents

Description	2
Table of Contents	3
Maximum Ratings	4
Thermal Resistances	4
Electrical Characteristics	5
Electrical Characteristics Diagram	6
Package Drawings	9
Revision History	10
Disclaimer	11

Maximum ratings

Parameter	Symbol	Value	Unit
Repetitive peak reverse voltage	V_{RRM}	1200	V
Continues forward current for $R_{th(j-c,max)}$ $T_C = 155^\circ\text{C}$, $D=1$ $T_C = 135^\circ\text{C}$, $D=1$ $T_C = 25^\circ\text{C}$, $D=1$	I_F	10.0 15.2 31.9	A
Surge non-repetitive forward current, sine halfwave $T_C=25^\circ\text{C}$, $t_p=10\text{ms}$ $T_C=150^\circ\text{C}$, $t_p=10\text{ms}$	$I_{F,SM}$	99 84	A
Non-repetitive peak forward current $T_C = 25^\circ\text{C}$, $t_p=10 \mu\text{s}$	$I_{F,max}$	711	A
i^2t value $T_C = 25^\circ\text{C}$, $t_p=10 \text{ms}$ $T_C = 150^\circ\text{C}$, $t_p=10 \text{ms}$	$\int i^2 dt$	49 35	A ² s
Diode dv/dt ruggedness $V_R=0\dots960\text{V}$	dv/dt	80	V/ns
Power dissipation $T_C = 25^\circ\text{C}$	P_{tot}	165	W
Operating temperature	T_j	-55...175	$^\circ\text{C}$
Storage temperature	T_{stg}	-55...150	$^\circ\text{C}$
Soldering temperature, wavesoldering only allowed at leads, 1.6mm (0.063 in.) from case for 10 s	T_{sold}	260	$^\circ\text{C}$
Mounting torque M3 and M4 screws	M	0.7	Nm

Thermal Resistances

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Characteristic						
Diode thermal resistance, junction – case	$R_{th(j-c)}$		-	0.7	0.91	K/W
Thermal resistance, junction – ambient	$R_{th(j-a)}$	leaded	-	-	62	K/W

Electrical Characteristics
Static Characteristics, at $T_j=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Static Characteristic						
DC blocking voltage	V_{DC}	$T_j = 25^\circ\text{C}$	1200	-	-	V
Diode forward voltage	V_F	$I_F=10\text{A}, T_j=25^\circ\text{C}$	-	1.5	1.8	V
		$I_F=10\text{A}, T_j=150^\circ\text{C}$	-	2.0	2.6	
Reverse current	I_R	$V_R=1200\text{V}, T_j=25^\circ\text{C}$		4	62	μA
		$V_R=1200\text{V}, T_j=150^\circ\text{C}$		22	320	

Dynamic Characteristics, at $T_j=25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	typ.	max.	
Dynamic Characteristics						
Total capacitive charge	Q_C	$V_R=800\text{V}, T_j=150^\circ\text{C}$ $Q_C = \int_0^{V_R} C(V)dV$	-	41	-	nC
Total Capacitance	C	$V_R=1\text{V}, f=1\text{MHz}$	-	525	-	pF
		$V_R=400\text{V}, f=1\text{MHz}$	-	37	-	
		$V_R=800\text{V}, f=1\text{MHz}$	-	29	-	

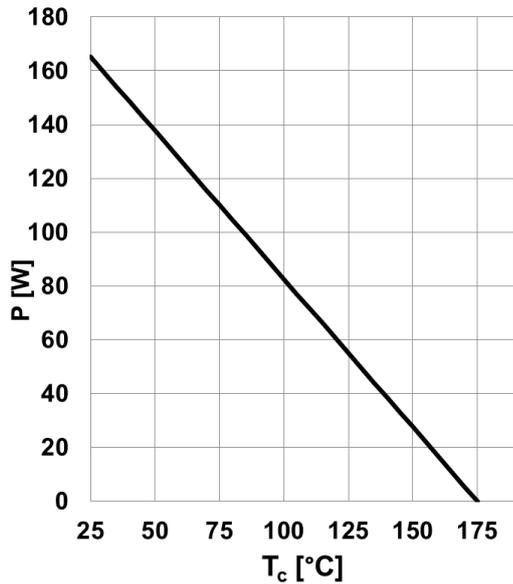


Figure 1. Power dissipation as a function of case temperature, $P_{tot}=f(T_c)$, $R_{th(j-c),max}$

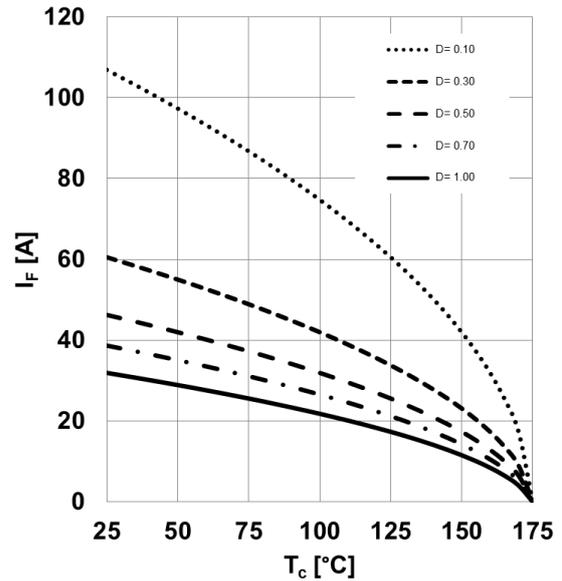


Figure 2. Diode forward current as function of temperature, $T_j \leq 175^\circ\text{C}$, $R_{th(j-c),max}$, parameter D =duty cycle, V_{th} , R_{diff} @ $T_j=175^\circ\text{C}$

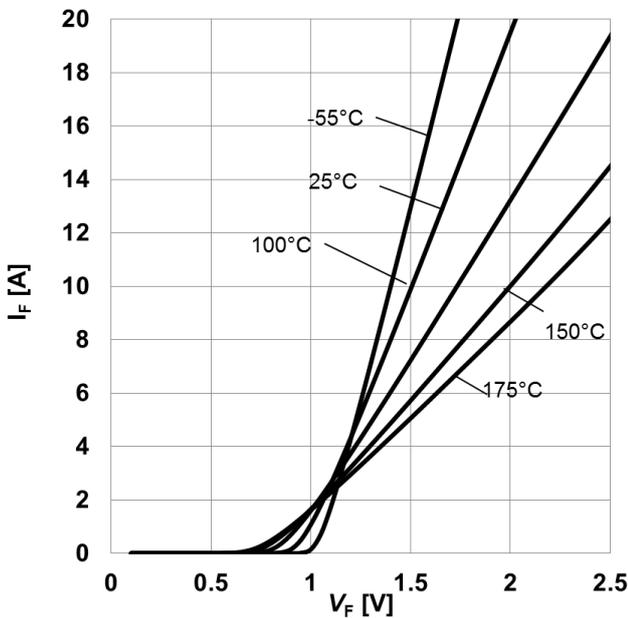


Figure 3. Typical forward characteristics, $I_F=f(V_F)$, $t_p=10 \mu\text{s}$, parameter: T_j

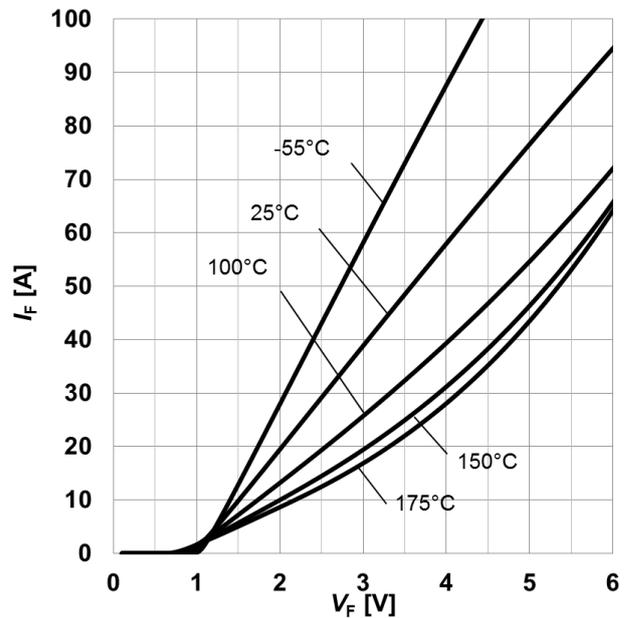


Figure 4. Typical forward characteristics in surge current, $I_F=f(V_F)$, $t_p=10 \mu\text{s}$, parameter: T_j

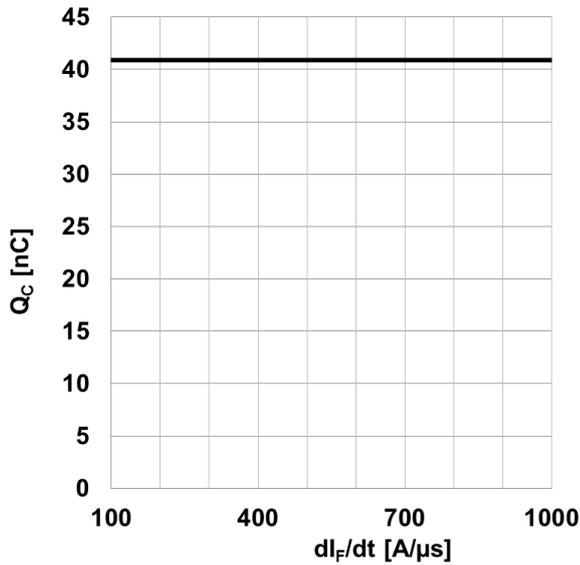


Figure 5. **Typical capacitive charge as function of current slope**¹, $Q_C=f(di_F/dt)$, $T_j=150^\circ\text{C}$
 1) Only capacitive charge, guaranteed by design.

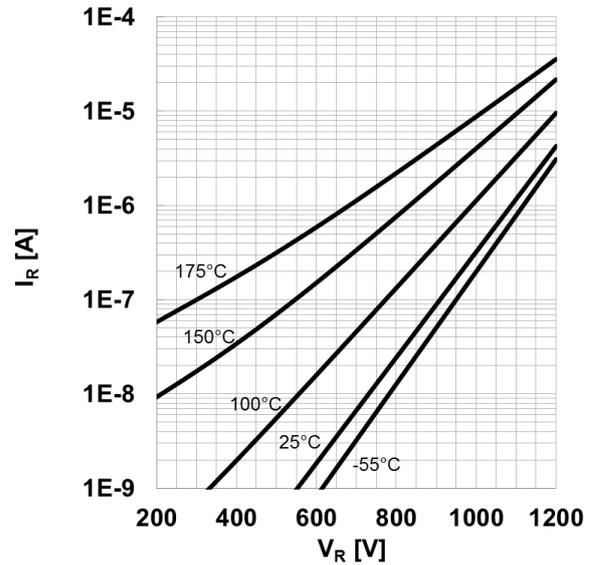


Figure 6. **Typical reverse current as function of reverse voltage**, $I_R=f(V_R)$, parameter: T_j

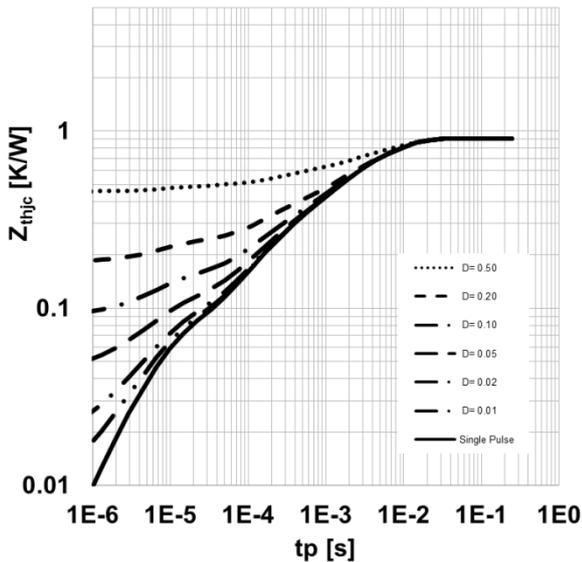


Figure 7. **Max. transient thermal impedance**, $Z_{th,jc}=f(t_p)$, parameter: $D=t_p/T$

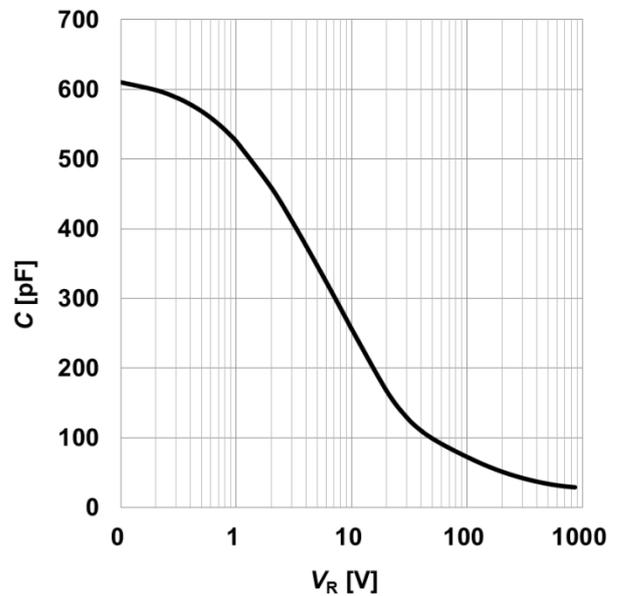


Figure 8. **Typical capacitance as function of reverse voltage**, $C=f(V_R)$; $T_j=25^\circ\text{C}$; $f=1\text{ MHz}$


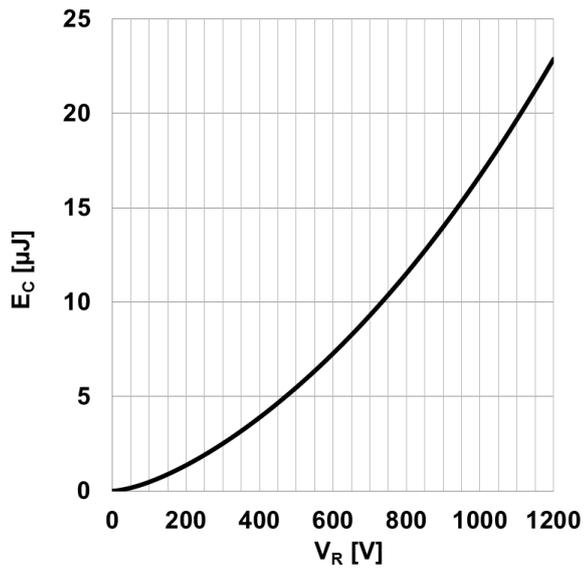


Figure 9. Typical capacitively stored energy as function of reverse voltage,

$$E_C = \int_0^{V_R} C(V)VdV$$

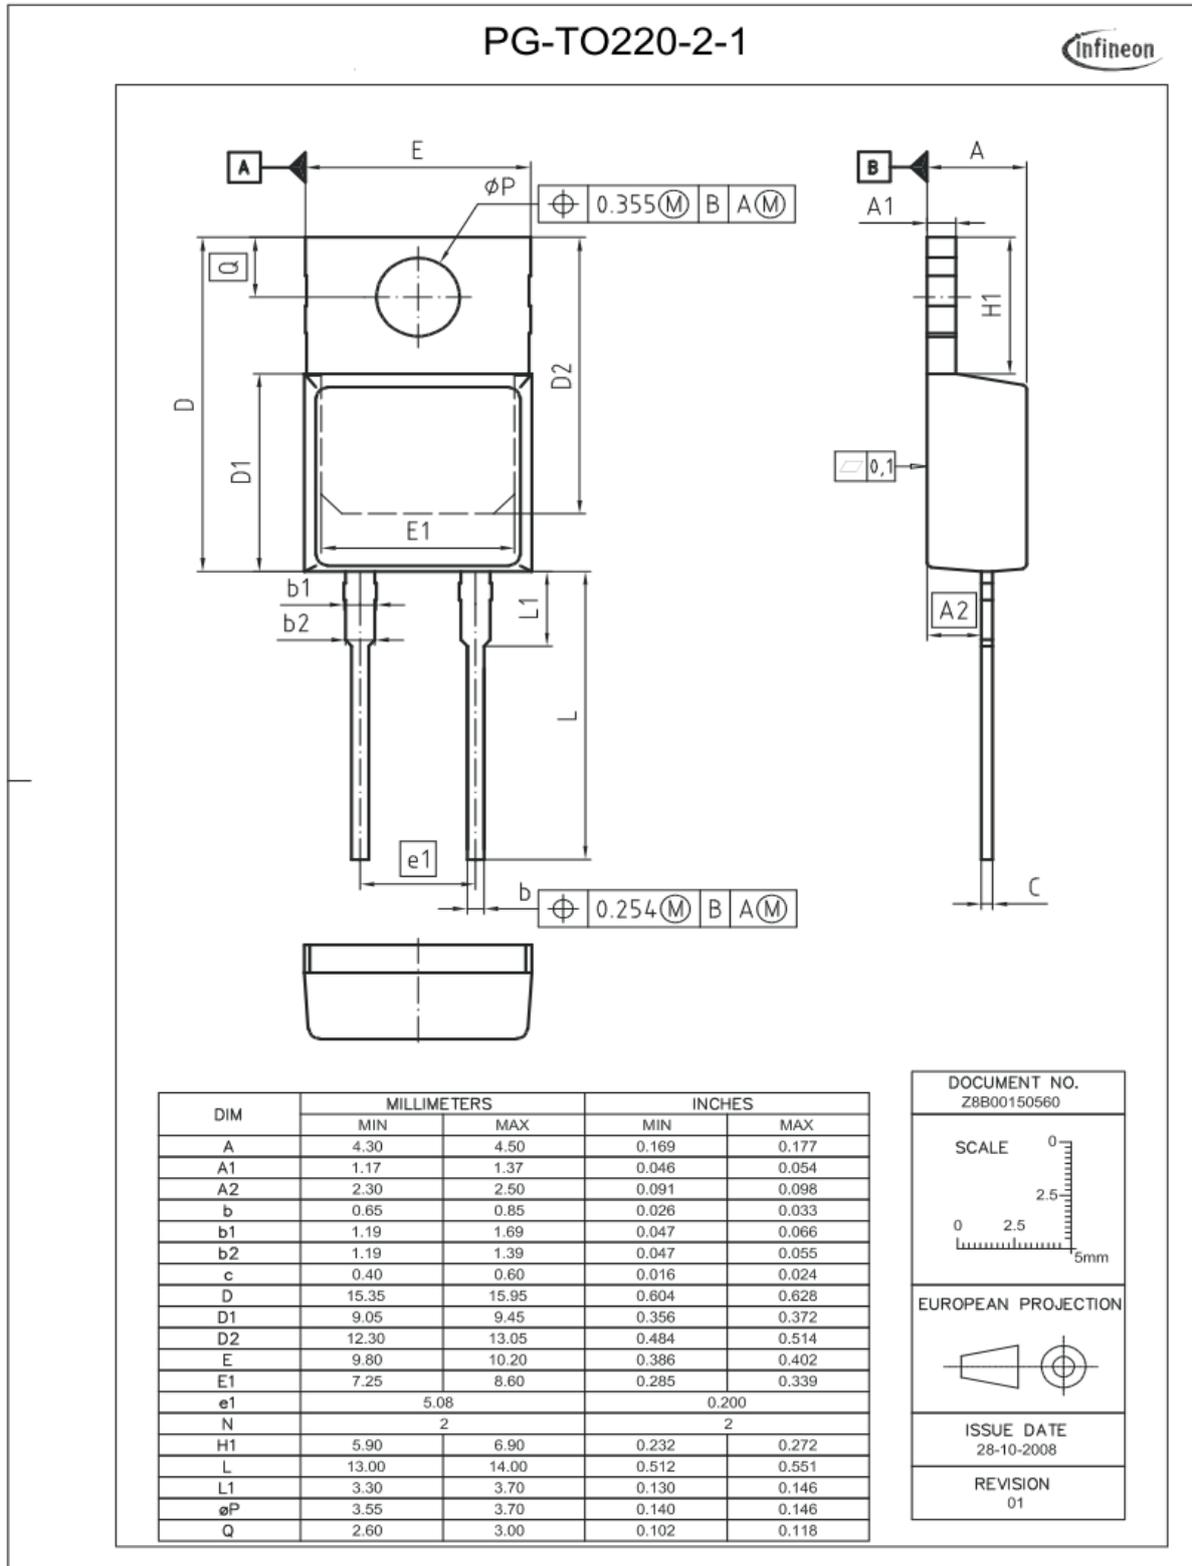

Revision History

IDH10G120C5

Revision: 2017-07-21, Rev. 2.1

Previous Revision:

Revision	Date	Subjects (major changes since last version)
2.0	2015-07-22	Final data sheet
2.1	-	Editorial Changes

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to: erratum@infineon.com

Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2017.
All Rights Reserved.

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office (www.infineon.com).

Please note that this product is not qualified according to the AEC Q100 or AEC Q101 documents of the Automotive Electronics Council.

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru