
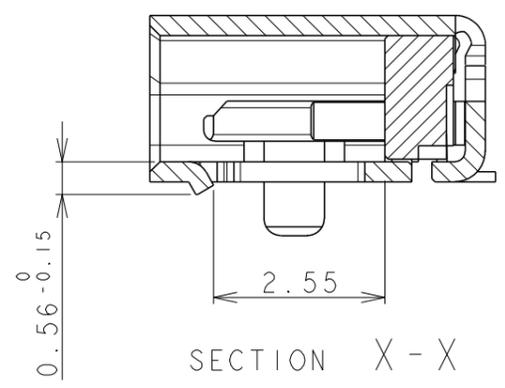
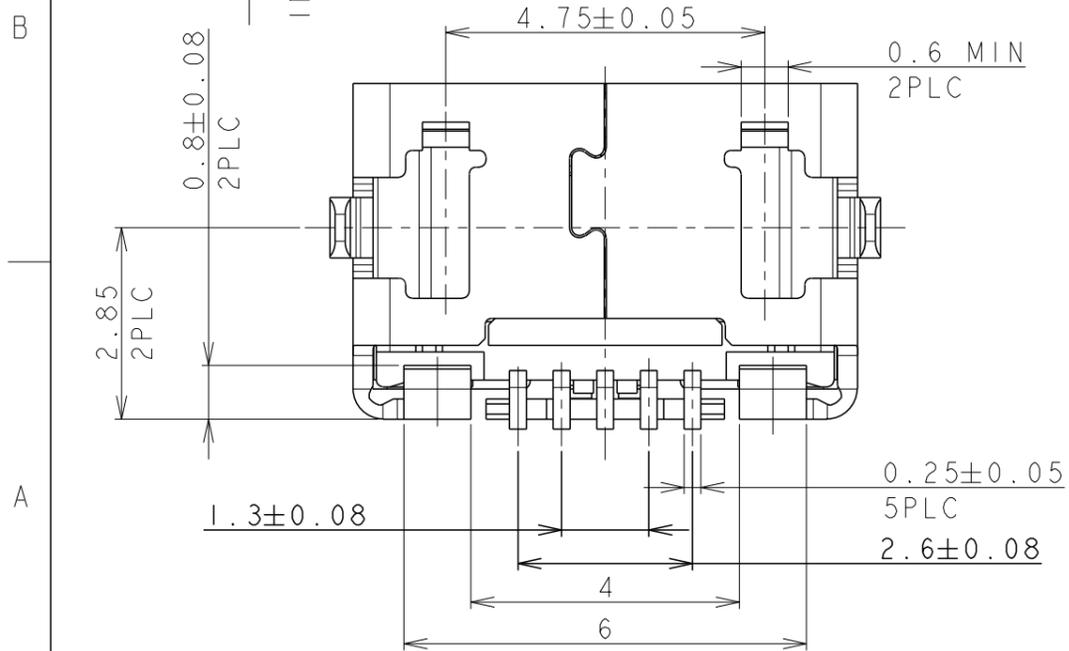
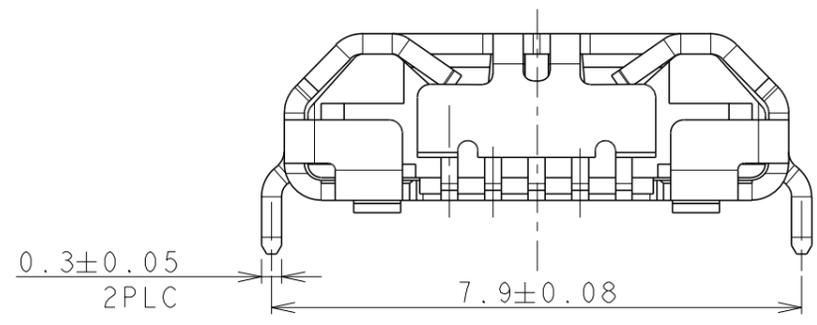
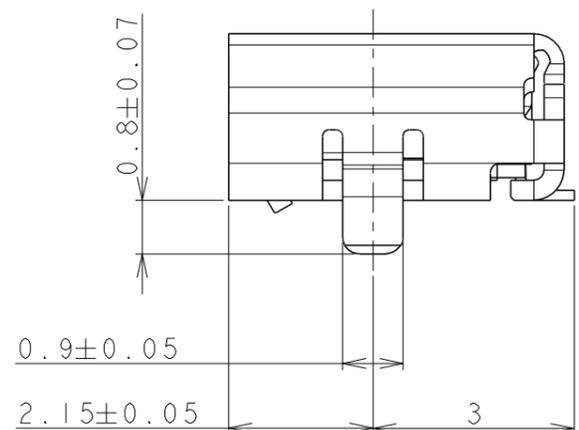


△ MATERIAL  
 CONTACT: COPPER ALLOY  
 SHELL: STAINLESS STEEL  
 HOUSING: HIGH TEMPERATURE THERMO PLASTIC  
 UL94V-0 BLACK  
 △ FINISH  
 CONTACT: 0.5 um MIN. GOLD PLATING ON CONTACT SURFACE AND  
 0.05 um MIN. GOLD PLATING ON SOLDERING TINE SURFACE  
 ALL OVER 0.8 um MIN NICKEL UNDER PLATING.  
 SHELL: TIN PLATING ALL OVER NICKEL UNDER PLATING.  
 CONTACT COPLANARITY: 0.08 MAX  
 REFERENCE PICK AND PLACE AREA.  
 DATE CODE MARKING: YWWD (YEAR/WEEK/DAY)  
 SLP4 (SHIFT, LINE, P4=REVISION CODE)  
 △ 3 RECOMMENDED PCB THICKNESS: 1.0±0.08  
 △ 7 RECOMMENDED STENCIL THICKNESS: 0.10mm.

△ 6 RECOMMENDED PCB LAYOUT (GENERAL TOLERANCE: ±0.05)  
 VIEWED FROM CONNECTOR MOUNT SIDE  
 SCALE 5:1

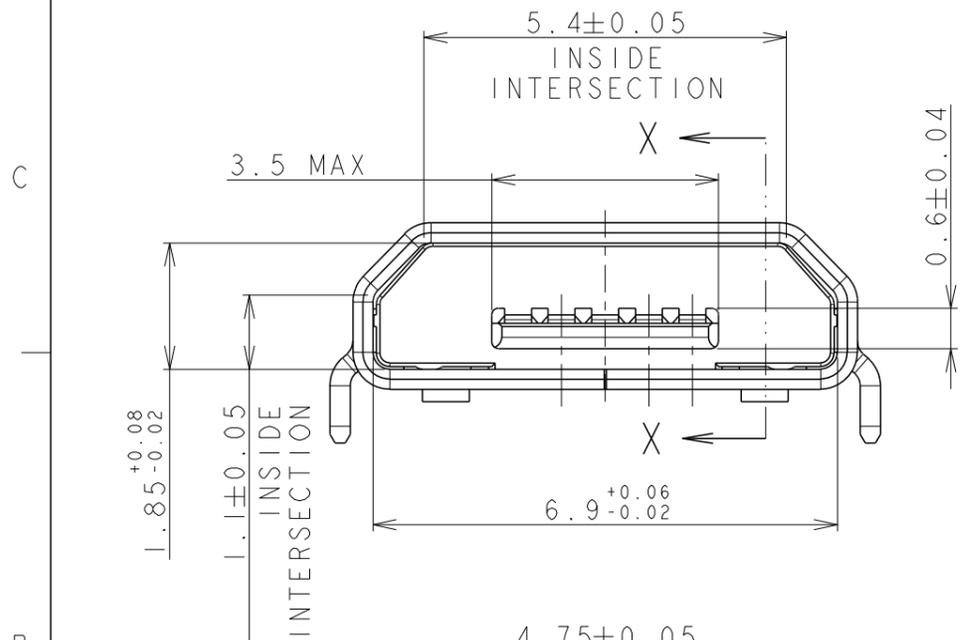

1932788-1; AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Ming Shi	01AUG2011	
		CHK	Martin Li	01AUG2011	
		APVD	Steven Yao	01AUG2011	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3			
		0 PLC	±		
		1 PLC	±		
		2 PLC	±		
		3 PLC	±		
		4 PLC	±		
		ANGLES	±	±5°	
MATERIAL		FINISH			
△ 1		△ 2			
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION © COPYRIGHT 2011 ALL RIGHTS RESERVED.		LOC	ES	DIST	00
		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE	01AUG2011	M.S	S.Y
	A1	REVISED PER ECO-15-009877	03AUG15	AP	JH
NAME		MICRO USB CONNECTOR RECEPTACLE REVERSE TYPE B FLANGELESS			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
A3	00779	C-1932788			
CUSTOMER DRAWING		SCALE	8:1	SHEET	1 OF 2
		REV	A1		

4







3

2

1

THIS DRAWING IS UNPUBLISHED.      RELEASED FOR PUBLICATION  
 © COPYRIGHT 20      ALL RIGHTS RESERVED.

LOC ES	DIST 00	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

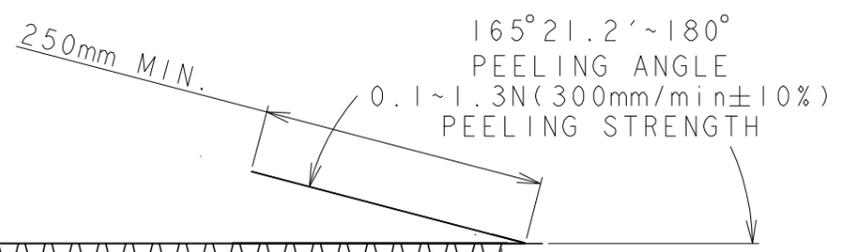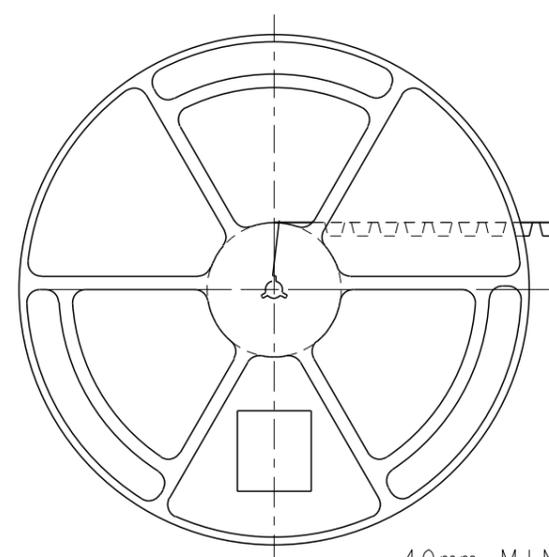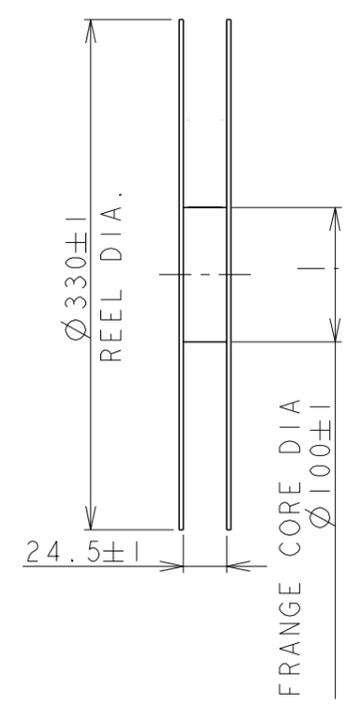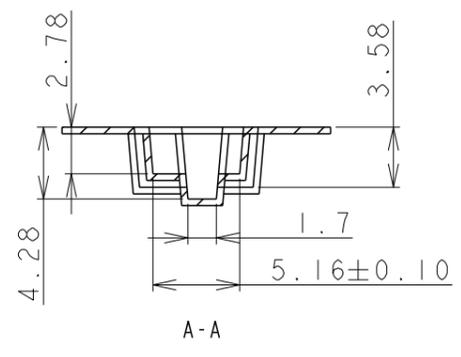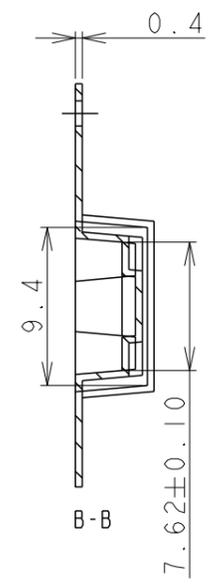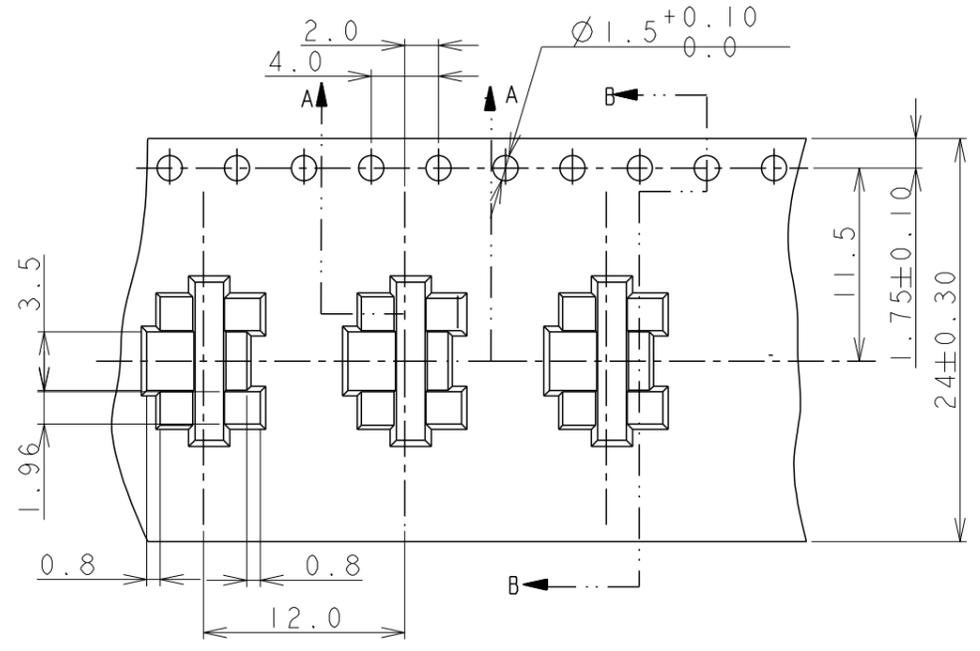

40mm MIN. WITHOUT CHARGE SEALED WITH COVER TAPE      WITH PRODUCT CHARGE 1000 PCS/IREEL      100mm MIN. WITHOUT CHARGE SEALED WITH COVER TAPE

NOTES:  
 1. MATERIAL: ANTISTATIC PS CLEAR, THICKNESS 0.40mm.  
 2. QUANTITY PER REEL: 1000 PCS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Ming Shi 01AUG2011	TE Connectivity	
DIMENSIONS: mm		CHK Martin Li 01AUG2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3		APVD Steven Yao 01AUG2011	NAME	
		PRODUCT SPEC 108-115022-1	MICRO USB CONNECTOR RECEPTACLE REVERSE TYPE B FLANGELESS	
MATERIAL		FINISH	SIZE A3	CAGE CODE 00779
		WEIGHT X.XXg	DRAWING NO C-1932788	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 8:1	SHEET 2 OF 2
			REV A1	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)