

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


-,-

© COPYRIGHT - By -


ALL RIGHTS RESERVED.

REVISIONS




P	LTR	DESCRIPTION	DATE	DWN	APVD
	AD4	PN 1-163087-0 OBSOLETE	18MAY2017	TJ	NG
	AD5	AS PER ECO-18-006235	04MAY2018	RS	MZ

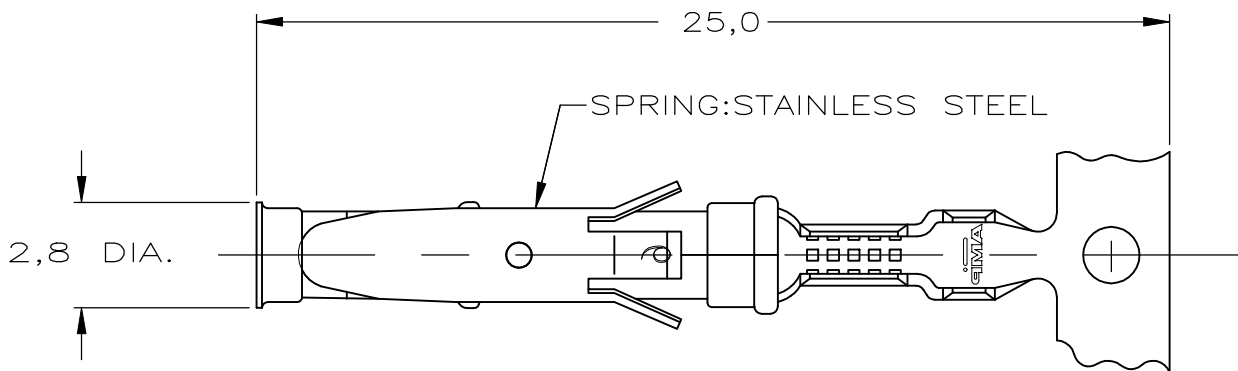


STRIP

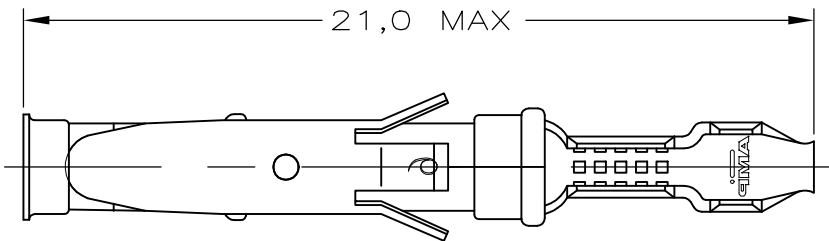

LOOSE-PIECE

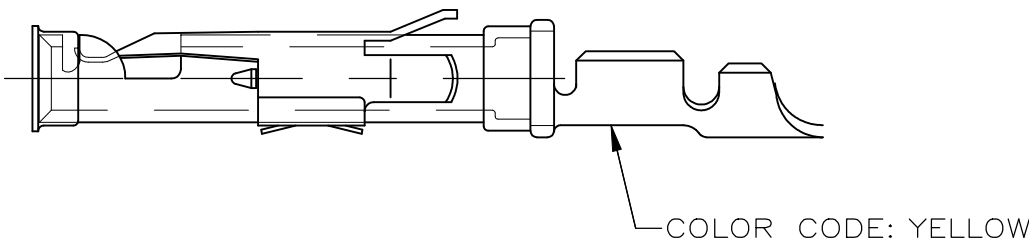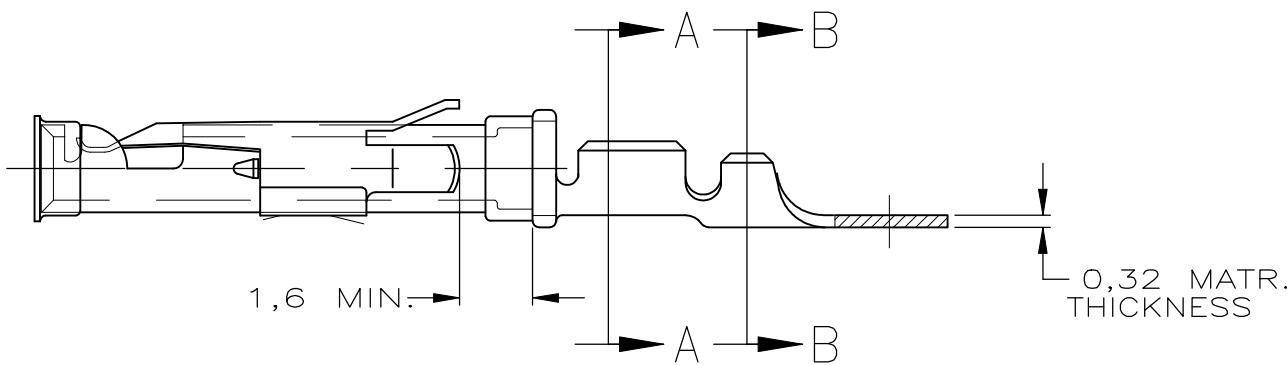

SECTION A-A




SECTION B-B

WIRE RANGE : 0,2-0,50 mm ² (24-20 AWG)
INSUL. RANGE : 1,1 -1,8 mm (.080-.100)


NOTES :

- 1 UL RECOGNIZED UNDER E28476 VOL VI SEC I
- 2 FOR CRIMP DETAILS SEE SPEC. 114-19000
- 3 MEETS PRODUCT SPECIFICATION 108-10042
- 4 SPECIAL REEL WITH 200PCS FOR REEL-FED HAND-TOOL
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 6 OBSOLETE
- 7 OMISSION OF 6 CONTACTS MAX PER REEL OF 5000PCS
- 31 LUBRICATED

NOTES	MATERIAL	THICKNESS	AREA
20	TIN	2,0 μ m	ALL OVER
21	NICKEL GOLD TIN	0,8 μ m	ALL OVER CONTACT AREA BARREL
22	NICKEL GOLD GOLD	0,8 μ m	ALL OVER CONTACT AREA ALL OVER
23	NICKEL GOLD GOLD	1,2 μ m	ALL OVER CONTACT AREA ALL OVER
27	NICKEL SILVER TIN	2,5 μ m	ALL OVER CONTACT AREA BARREL
28	SILVER NICKEL	1,5-2,5 μ m 0,76 μ m	ALL OVER
29	SILVER	2,5 μ m	ALL OVER
30	NICKEL BR TIN	1,27 μ m	ALL OVER

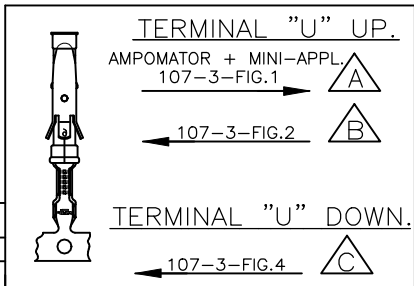

THIS DRAWING IS A CONTROLLED DOCUMENT.



MATERIAL REFER TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH REFER TABLE

1-163087-5	A	61-163088-4	BRASS	SILVER	28
1-163087-4	A	61-163088-4	BRASS	EL.TIN	31 20
5 OBSOLETE 1-163087-3	A	61-163088-3	BRASS	BR.TIN/LEAD	30
5 OBSOLETE 5-163087-3	C		BRASS	ECON.GOLD	21
5-163087-2	C		BRASS	SEL.GOLD	22
5-163087-1	C		BRASS	EL.TIN	20
1-163087-2	B	61-163088-1	BRASS	GOLD	23
1-163087-1	A		BRASS	ECON.GOLD	21
6 OBSOLETE 1-163087-0	B	1-163088-0	BRASS	ECON.GOLD	21
163087-9	A		BRASS	EL.TIN	20
163087-8	A		BRASS	SEL.GOLD	22
163087-2	B	163088-2	BRASS	SEL.GOLD	22
163087-1	B	163088-1	BRASS	EL.TIN	20
PART NUMBER	DIRECTION OF REEL	LOOSE-PIECE	MATERIAL	PLATING	

DWN M THAJUDEEN 21JULY2015
CHK GANI NIMBENNAPPA 21JULY2015
APVD PRASHANTH S 21JULY2015
PRODUCT SPEC 108-10042
APPLICATION SPEC 114-19000
WEIGHT 0.539g
CUSTOMER DRAWING

TE Connectivity			
NAME TYPE III+, SIZE 16, SOCKET ASS'Y, 24-20 AWG, 1.1-1.8mm DIA INSULATION			
SIZE A3	CAGE CODE 00779	DRAWING NO C-163087	RESTRICTED TO -
SCALE -		SHEET 1 OF 1	REV AD5

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru