



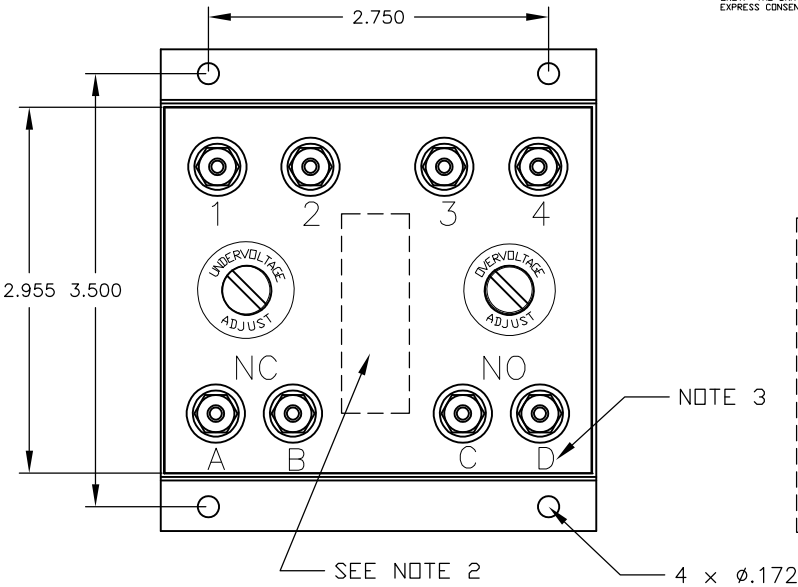

CONNECTIONS

460VAC, 3 PHASE
NOMINAL

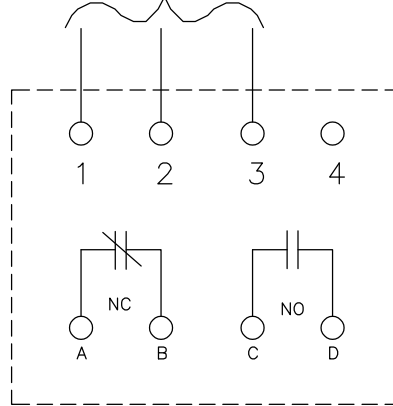

SPECIFICATIONS

NOMINAL VOLTAGE : 460 VOLTS L-L, 3 PHASE

NOMINAL FREQUENCY : 50-400Hz

TRIP POINT RANGE : UNDERVOLTAGE: 345-460 VOLTS, SCREWDRIVER ADJUSTABLE.

OVERVOLTAGE: 460-575 VOLTS, SCREWDRIVER ADJUSTABLE.

PICK-UP TO DROP-OUT DIFFERENTIAL : 3% MAXIMUM.

OPERATING TEMPERATURE : -40°C TO +85°C

TEMPERATURE DRIFT : ±1% MAXIMUM VOLTAGE ERROR OVER THE TEMPERATURE RANGE.

OUTPUT CONTACTS : ONE SET NORMALLY CLOSED.
ONE SET NORMALLY OPEN.



CONTACT RATING : 5 AMP. RESISTIVE AT 120VAC
5 AMP. RESISTIVE AT 28VDC

OPERATION : THE NORMALLY CLOSED CONTACTS OPEN, AND THE N.O. CONTACTS CLOSE AT NOMINAL VOLTAGE.
THE CONTACTS DE-ENERGIZE AT UNDERVOLTAGE AND OVERVOLTAGE.

10. CONSTRUCTION : SOLID STATE SENSOR WITH RELAY OUTPUT ENCLOSED IN A SEALED STEEL CAN WITH PURE TIN PLATING PER MIL-T-10727 TYPE 1.

NOTES:

1. THE VOLTAGE TRIP POINTS ARE FACTORY SET AS FOLLOWS:
UNDERVOLTAGE : 440 ± 10 VOLTS.
OVERVOLTAGE : 500 ± 10 VOLTS.
2. "EMD P/N 9337151", DATE AND SERIAL NO. TO BE STAMPED IN THIS LOCATION.
3. STAMP LETTERS A, B, C, & D IN LOCATIONS SHOWN.
4. REMOVE SCREWS FOR ACCESS TO UNDERVOLTAGE AND OVERVOLTAGE TRIP ADJUSTMENTS.
CLOCKWISE ROTATION OF THE ADJUSTMENT POTENTIOMETERS WILL RAISE THE TRIP POINTS.
5. CONTACT RESISTANCE IS FACTORY TESTED NOT TO EXCEED 100mΩ AT 100mA AND 28VDC.
6. CONTACTS SHOWN IN THE CONNECTION DIAGRAM ARE SHOWN DE-ENERGIZED.

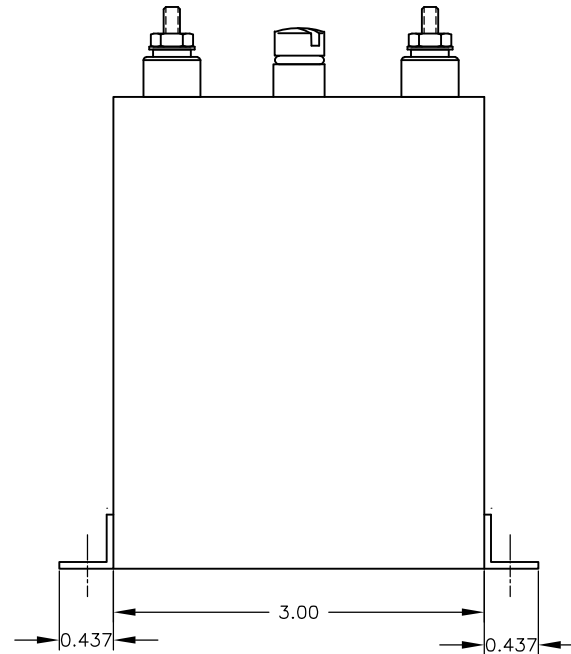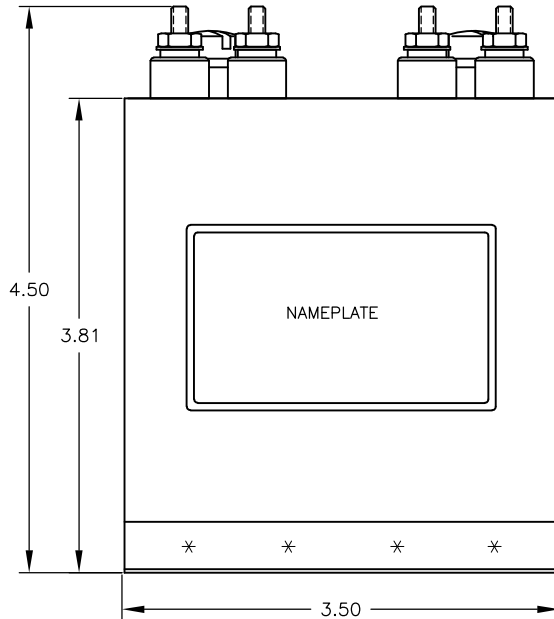

CD		CUSTOMER DRAWING	
DRAWING PER ASME/ANSI Y14.5 THIRD ANGLE PROJECTION		550 Linden Ave. Carpinteria, CA US 93013 Internet: www.te.com	
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. Block Tolerances are not applied if values are set to zero. FRACTIONS DECIMALS ANGLES 1/64 .001 .01		TITLE OVER/UNDERVOLTAGE RELAY	
ECCO No. REV. A		KILDVAC. NO. 255-6X	
REDRAW		SCALE 1:1	
CAGE CODE 18741		DO NOT SCALE DRAWING	
EDITED BY AV		SHEET 1 of 1	
EFTV DATE 08-16-12		APPROVED BY TN	
APRV DATE 08-21-12		SIZE B	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru