VD motor.

VD-49.15-K1

- 3-phase external rotor motor with EC technology
- High poled motor structure for optimum power density
- Basic motor with electronic module K1 for operation on external control electronics
- Very good synchronization characteristics
- Robust mechanical design in IP 54 for industrial applications
- Long lifetime by using precision ball bearings
- Insulation class E
- Electrical connection via cable

Nominal data

Type		VD-49.15-K1-B00	VD-49.15-K1-D00
Nominal voltage (U_N)	V DC	24	48
Nominal speed (n_N)*	rpm	4 500	5 300
Nominal torque (M_N)*	mNm	235	245
Nominal current (I_N)*	A	6.10	3.40
Nominal output power (P_N)*	W	110	135
Starting torque (M_{max})	mNm	1 150	1 300
Permissible peak current (I_{max})**	A	30.0	18.5
Speed at no-load operation (n_L)	rpm	6 000	
No-load current (I_L)	A	0.47	0.36
Recommended speed control range	rpm	0 ... 6 000	
Rotor moment of inertia (J_R)	kgm² x10⁻⁶	108	
Motor constant (K_E)	mVs/rad	41.0	80.7
Connection resistance (R_V)	Ω	0.23	0.62
Connection inductance (L_V)	mH	0.17	0.62
Overload protection		To be implemented via the control electronics	
Permissible ambient temperature range (T_U)	°C	0 ... +40	
Weight	kg	0.59	
Order no. (cable type)***	IP 54	937 4915 000	937 4915 001

Subject to alterations

* At T_U max. 40°C
** Permissible time for peak current: max. 1 sec. – to be repeated only after complete cool down
*** Classification of protection class refers to installed state with sealing on the flange side

Characteristic curve

VD-49.15-K1-B00 (at 25°C)

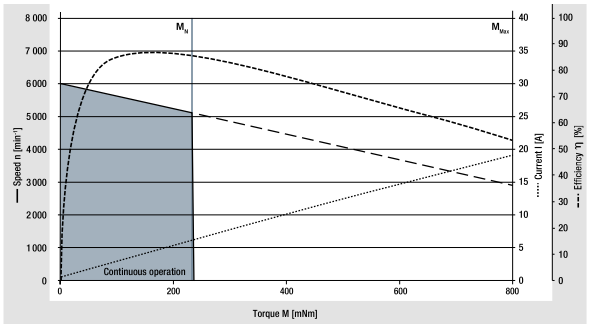

¹) Nominal data, see table

VD-49.15-K1-D00 (at 25°C)

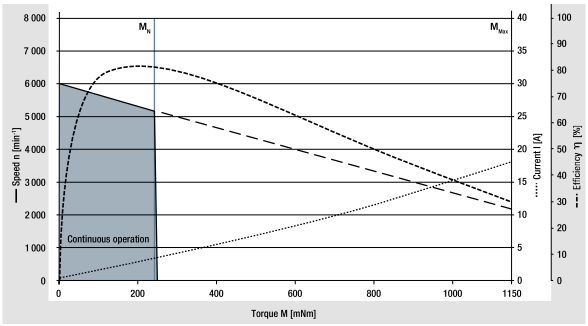

¹) Nominal data, see table

Technical drawing

All dimensions in mm

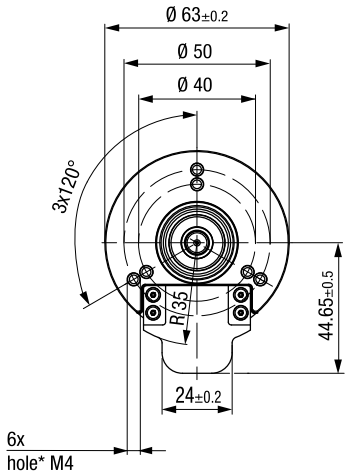

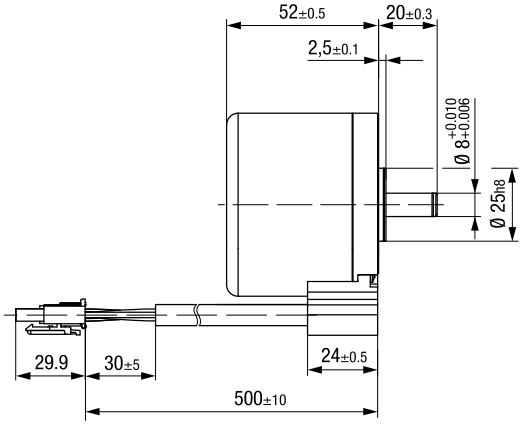



F_{axial}	20 N	Permissible shaft load at nominal speed and life expectancy L_{10} (nominal operation) of 20 000 h (at T_U max. 40°C)
F_{radial}	60 N	
L1	10 mm	

* For thread-rolling screws according to DIN 7500

Electrical connection

Supply wire		
No.	**Color**	**Function**
1	yellow	Phase W
2	violet	Phase V
3	brown	Phase U



Molex plug
no. 39-03-6035



Molex plug
no. 39-01-2085

Signal wire		
No.	**Color**	**Function**
1	–	–
2	red	+12 V
3	white	Hall B
4	green	Hall A
5	–	–
6	–	–
7	black	GND
8	gray	Hall C

Modular construction kit

Recommended external control electronics	
VTD-XX.XX-K3	Speed (page 34)
VTD-XX.XX-K4S	Position (page 36)
VTD-60.13-K5SB	Position (page 38)

Basic motor

Planetary gearheads

NoiselessPlus 63 (page 44)
Performax® 63 (page 46)
Performax®Plus 63 (page 48)

Crown gearheads

EtaCrown® 75 (page 50)
EtaCrown®Plus 63 (page 52)

Spur gearheads

Compactline 91 (page 56)
Flatline 85 (page 60)

Crown gearheads.

EtaCrown® 75

Image of 2-stage gearhead

- Maximum safety in design and operation, as well as optimal vandalism protection; no automatic lock due to high efficiency of the crown wheel technology
- Space-saving installation due to zero offset axle and symmetrical structure
- Flexible application possibilities with various optional shaft outlets and available shaft geometries
- Wide reduction range by means of upstream / downstream planetary stage
- High radial loads due to double ball bearing in the output shaft

Nominal data

Gearheads		EtaCrown® 75.1			EtaCrown® 75.2			
Reduction ratio		4.10	6.70	10.1	20.3	33.3	60.0	113
No. of stages		1			2			
Efficiency		0.90			0.81			
Max. input speed (n_1)	rpm	6 000			6 000			
Rated output torque (M_{ab})	Nm	6.00	5.00	2.43	10.0	10.0	10.0	10.0
Short-term torque (M_{max})	Nm	15.0	12.5	6.08	25.0	25.0	25.0	25.0
Gear play	°	0.55 ... 1.1			0.55 ... 1.1			
Permissible operating temperature (T_U)	°C	-20 ... +80			-20 ... +80			
Operating mode		S1			S1			
Protection class		IP 50			IP 50			
Weight	kg	0.9			1.3			
Shaft load radial / axial	N	150 / 500	250 / 500	400 / 500	550 / 500	800 / 500	1 100 / 500	1 300 / 500
Service life	h	5 000			5 000			
Lubrication		Maintenance-free grease lubrication for life						
Installation position		any						
Subject to alterations								
	on request							

Technical drawing

Image of 1-stage gearhead with left shaft end (W05) / All dimensions in mm

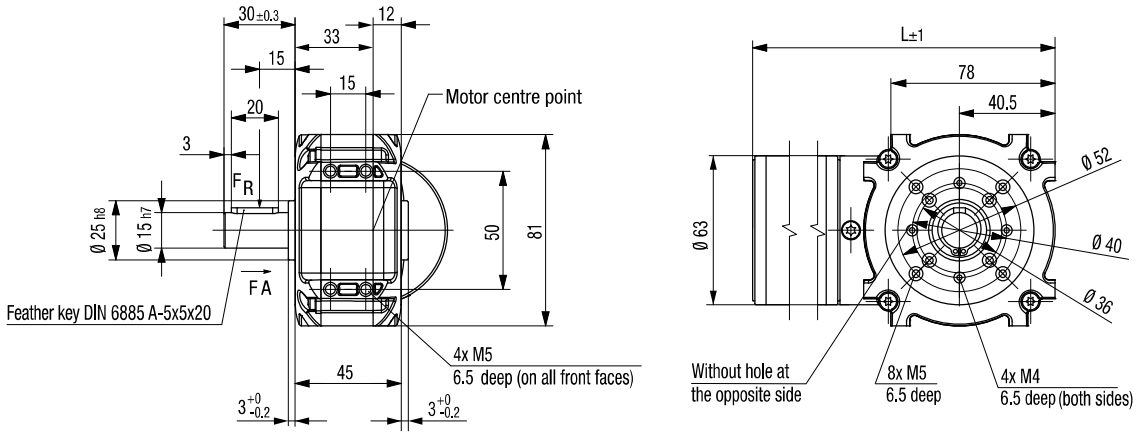



F_{axial}	500 N
F_{radial}	see table
L1	15 mm

Permissible shaft load at nominal speed and life expectancy L_{10} (nominal operation) and operating factor $C_B = 1$ (see page 82) of 5 000 h (at T_U 40°C).

Shaft end, right (W05) (standard)	Shaft end, left (W06)	Shaft end, both sides (W07)	Hollow shaft (W08)
			 Hollow shaft Ø 10 mm

Length of the possible motor / gearhead combinations

Motor / gearhead		L - 1-stage	L - 2-stage
ECI-63.20-K1-E75	mm	197	233
ECI-63.40-K1-E75	mm	217	253
ECI-63.60-K1-E75	mm	237	273
ECI-63.20-K3-E75	mm	210	246
ECI-63.40-K3-E75	mm	230	266
ECI-63.60-K3-E75	mm	250	286
ECI-63.20-K4-E75	mm	210	246
ECI-63.40-K4-E75	mm	230	266
ECI-63.60-K4-E75	mm	250	286
ECI-63.20-K5-E75	mm	203	239
ECI-63.40-K5-E75	mm	223	259
ECI-63.60-K5-E75	mm	243	279

Subject to alterations

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru