






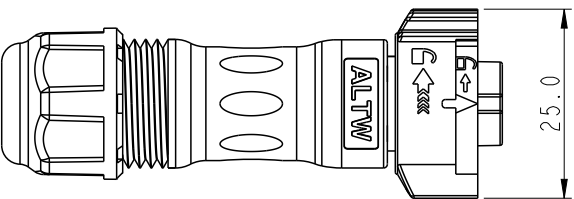

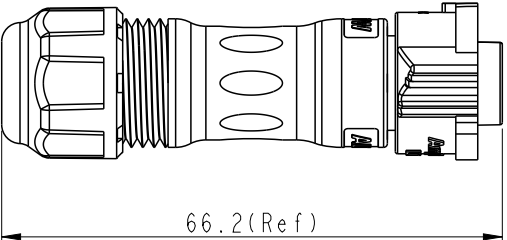




1		2		3		4		5		6		7		8	
				REV.		ECN NO.		DATE		SIGN		DESCRIPTION			
				A				2016/11/23		Victor Hung		Change Rev.01 To Rev.A			
				B		CI9I299		2019/07/26		Jane		Update Ordering Information			
															
				3 Seal Nut		2 Clamp Ring Semifinished Product		4 Pin (Option)		1 Connector Semifinished Product					
				Material Specification: * Connector: Nylon+GF, Black. * Pins: Copper Alloy, Gold Plated. * Seal & O-Ring: Silicone, Gray. * UL Rated: UL 94V-0, fl. * RoHS Compliant. Electrical Specification: * Contact Resistance: 10mΩ Max. * Insulation Resistance: 100MΩ Min. * Dielectric Withstand Voltage: 1,600 Vac. Mechanical Specification: * Durability: 1000 Cycles. * Tensile strength: 10 kgf. * Wire Conductor: 5A: 22AWG~20AWG 10A: 18AWG~16AWG * Wire Insulation OD: 5A: 1.9mm Max. 10A: 2.7mm Max. * Torque Force for Clamp Ring: 6~8 kgf-cm * Torque Force for Seal Nut: 6~8 kgf-cm Environmental Specification: * Waterproof Rating: IP68(Mated, 1M/24 Hours) * Temperature Range: -40°C to 105°C. * Salt Spray: Mated, 1000 Hours. * Safety Compliance: UL 1977.											
															
															
UNIT:mm				TITLE X-Lok B-Size Field Installable Cable Type F Conn				ITEM NO				DRAWN BY Jane		DATE 2019/07/26	
TOLERANCE		±0.5 mm		SCALE 8:5		SIZE A4		SHEET 1 OF 2		DWG NO BX-0XBFXA-QL8XXX		CHECKED BY Brady		DATE 2019/07/26	
				REV. B		WC-REV. A.3		QC:Inspection item		CUSTOMER ALTW		APPROVED BY Neo		DATE 2019/07/26	
1		2		3		4		5		6		7		8	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Ordering Information:

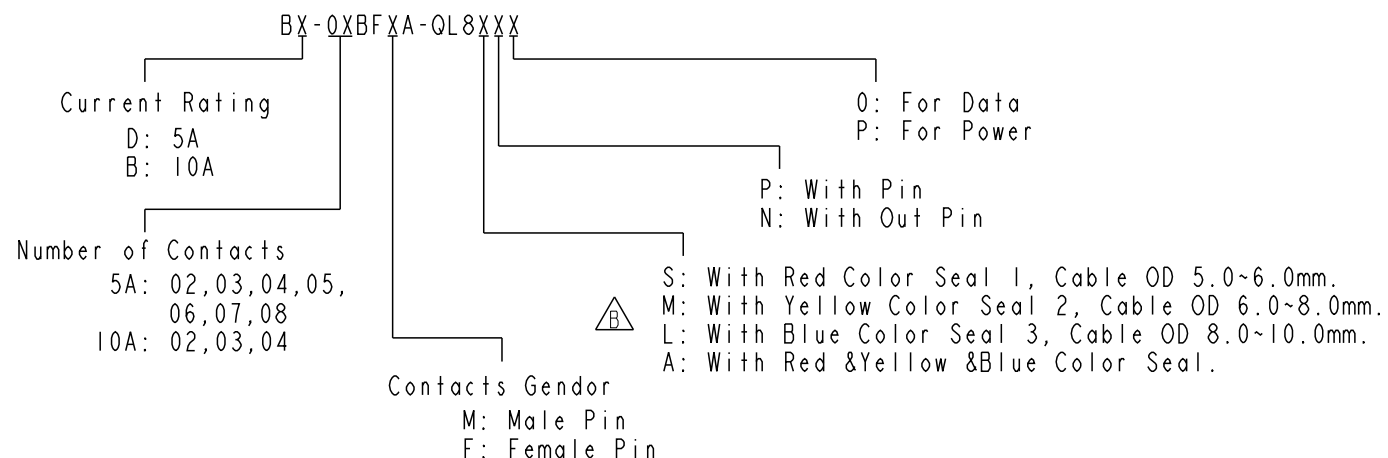

Mating Connector:


Overmolded with Cable: BX-0XAMXM-QL8XXX

Receptacle: BX-0XXMXS-QX8001

Field Installable: BX-0XBMXA-QLXXX


Tool Part No:

ASST-C-XXA-W-X



Pin Assignments Front View	10A ; 300Vac/Vdc 2 Contacts(02)	10A ; 300Vac/Vdc 3 Contacts(03)	10A ; 300Vac/Vdc 4 Contacts(04)	5A ; 300Vac/Vdc 2 Contacts(02)	5A ; 300Vac/Vdc 3 Contacts(03)	5A ; 300Vac/Vdc 4 Contacts(04)	5A ; 300Vac/Vdc 5 Contacts(05)	5A ; 300Vac/Vdc 6 Contacts(06)	5A ; 300Vac/Vdc 7 Contacts(07)	5A ; 300Vac/Vdc 8 Contacts(08)
Male Pin										
Female Pin										

UNIT:mm

TITLE
X-Lok B-Size Field Installable
Cable Type F Conn**Amphenol LTW**
安費諾亮泰企業股份有限公司

ITEM NO

DRAWN BY

DATE

DWG NO

CHECKED BY

DATE

CUSTOMER

APPROVED BY

DATE

TOLERANCE

±0.5 mm

SCALE 8:5

SIZE A4

SHEET 2 OF 2

REV. B

WC-REV. A.3

QC: Inspection item

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

ALTW

Jane

2019/07/26

Brady

2019/07/26

Neo

2019/07/26

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru